



Front View



Rear View

RTI Control System



ADM-1 Audio Delay Module

The ADM-1 Audio Delay Module is the ideal problem solver to lip-sync issues between audio output devices. For instance, when a television's internal speakers and ceiling speakers wired to an external audio system are used at the same time, there may be a noticeable delay due to differences in audio processing speed. The ADM-1 makes it easy to compensate for this delay and get the sound back in sync.

Key Features


- The perfect solution to lip-sync problems.
- Easily adjust delay increments using 16-way selector dial.
- Delay the audio from 20-340 ms.
- Compact design.
- Simple L/R RCA input and output connections.

Specifications

Power Supply	5v DC / 10W power supply (CE/FCC certified)
Power Consumption	Max 5 Watts
Audio Input Zones	1
Stereo L/R Inputs	1
Audio Output Zones.....	1
Stereo L/R Outputs	1
Dimensions HxWxD.....	0.9 in (2.4 CM) x 3.2 in (8 cm) x 2.5 in (6.4 cm)
Weight	0.1 lb (0.10 kg)
Operating Temp Range	0 to +35°C (32 to +95°F)
Operating Humidity Range	5 to 90% RH Non-condensing
Lip Sync Delay.....	Up to 340ms
Supported Audio Formats.....	Input: 2ch Stereo / Analogue line level
Warranty	Three Years (Parts & Labor)

All Specifications subject to change without notice.

Wiring Diagram

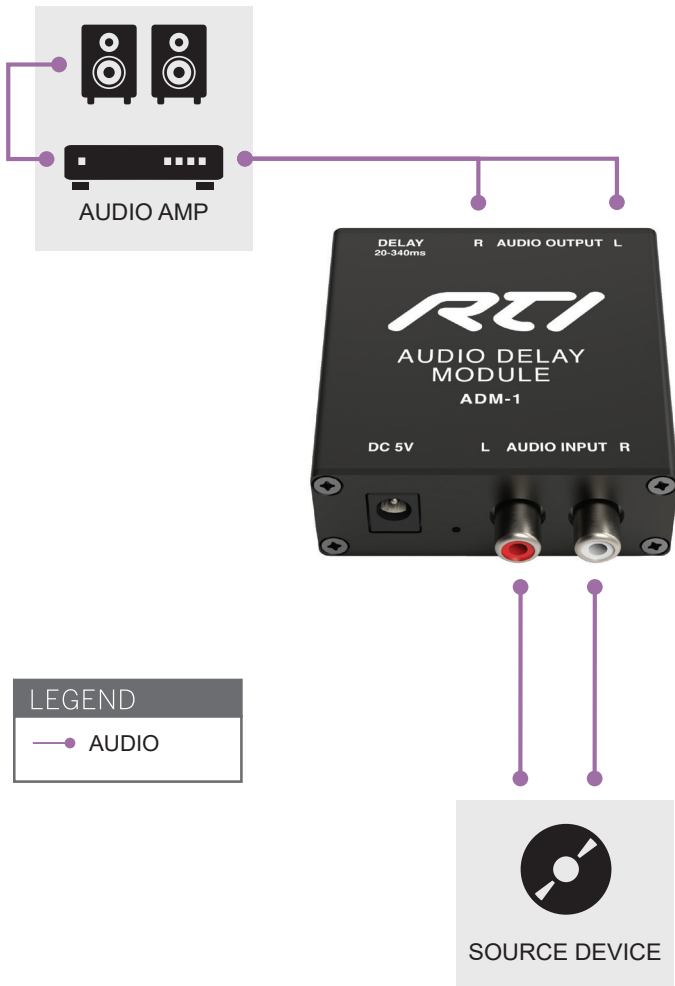

RTI User Interfaces

- Remote Controls
- Keypads
- Audio Control Keypads
- In-Wall Touchpanels
- Tabletop Touchpanels
- Mobile Apps



RTI Control Accessories

- Control Processors
- System Kits
- RS-232 Modules
- IR Modules
- Relay Modules
- Z-Wave Modules



RTI Audio/Video Distribution

- HDMI Splitters & Switchers
- HDMI Matrix Switchers
- HDBaseT Matrix Switchers
- HDBaseT Extenders
- Presentation Switchers
- Video over IP Transceivers



Remote Technologies Incorporated
 5775 12th Avenue East, Suite 180, Shakopee, MN 55379
 PH: (952) 253-3100 • Website: www.rticorp.com

